TERRACO

Swimming Pool Solutions

Terraco provides a comprehensive waterproofing and tiling system for swimming pools. The surface is pre-treated with Terraco Terrabond A. Terraco Weathercoat GP, a 2 component (acrylic / cementitious) permanent waterproofing system, is applied to the entire area. Once cured, the tiles are laid using Terraco Terrafix W11 with the gaps being grouted with Terraco Terragrout G11.

Primer / Bonding Agent

1 Terrabond® A

Package:
- 20kg
- 4kg
- 900ml

Tools: Roller

Available in: Milky White

Waterproofing

2 Weathercoat® GP

Standard kit:
- 15kg
- 5kg

Tools: Brush, Spray

Available in: Grey & Natural White

Tile Adhesive

3 Terrafix® W11

Package:
- 20kg

Tools: Notched trowel

Available in: Grey & White

Tile Grout

4 Terragrout® G11

Package:
- 25kg &
- 5kg

Tools: Grout spreader

Available in: 24 colours

TERRACO

www.terraco.com

SWEDEN • UK • IRELAND • RUSSIA • TURKEY • ALGERIA • EGYPT
JORDAN • UAE • THAILAND • VIETNAM • CHINA • KOREA

Rev. 11/2023

TERRACO®

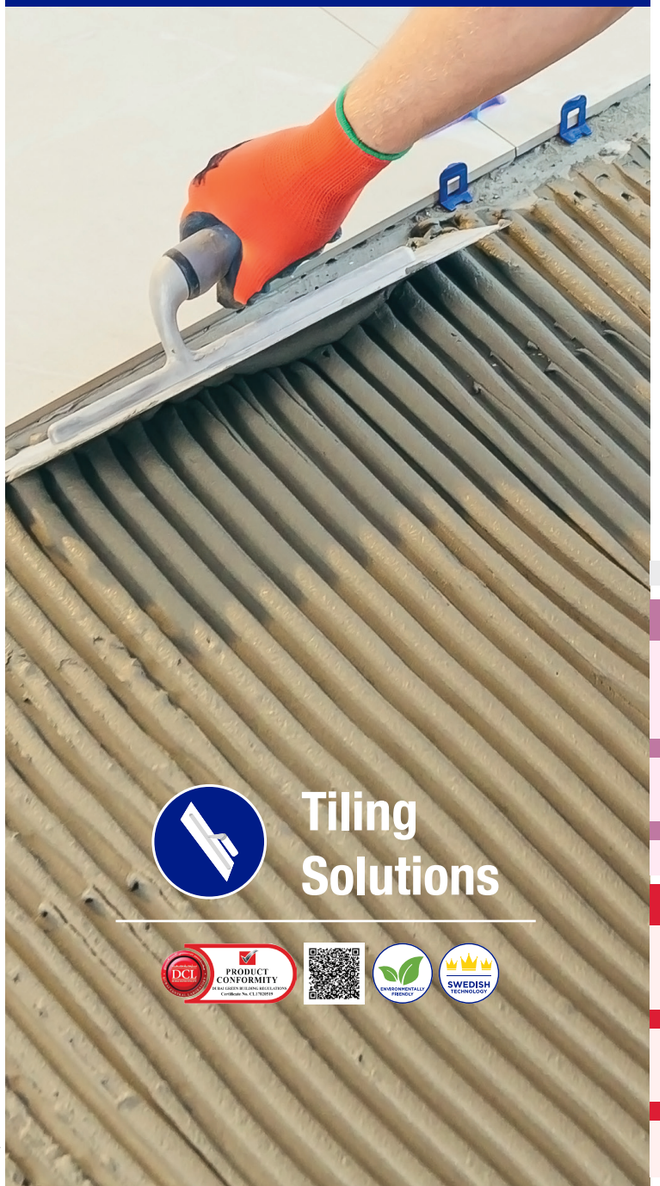

Tiling Solutions

PRODUCT CONFORMITY · ENVIRONMENTALLY FRIENDLY · SWEDISH TECHNOLOGY

TERRACO

Standard Colours

WHITE ☐ TG 1 ☐ MG 1	JASMIN ☐ TG 2 ☐ MG 2	CREAM ☐ TG 3 ☐ MG 3	SANDTAN ☐ TG 4 ☐ MG 4	SALMON ☐ TG 5 ☐ MG 5	CORAL ☐ TG 6 ☐ MG 6
GREEN TEA ☐ TG 7 ☐ MG 7	PLATINUM ☐ TG 8 ☐ MG 8	FOGGY HAZE ☐ TG 9 ☐ MG 9	GREY VELVET ☐ TG 10 ☐ MG 10	CUPPUCCINO ☐ TG 11 ☐ MG 11	CARAMEL ☐ TG 12 ☐ MG 12
SKY BLUE ☐ TG 13 ☐ MG 13	LEMON ☐ TG 14 ☐ MG 14	APRICOT ☐ TG 15 ☐ MG 15	CINNAMON ☐ TG 16 ☐ MG 16	MILK CHOCOLATE ☐ TG 17 ☐ MG 17	MOCCA ☐ TG 18 ☐ MG 18
BITTER CHOCOLATE ☐ TG 20 ☐ MG 20	BLACK ASPHALT ☐ TG 21 ☐ MG 21	GRAPHITE ☐ TG 22 ☐ MG 22	SUN WHITE ☐ TG 51 ☐ MG 51	DUNE ☐ TG 52 ☐ MG 52	AQUA BLUE ☐ TG 53 ☐ MG 53

Note: Slight colour difference might occur due to the application method on the chart.

Terragrout® G11 (TG) CG1 Polymer modified water resistant ceramic tile grout

Terraco Terragrout G11 is a hard-wearing, water resistant ceramic tile grouting compound for interrior and exterior use. **Terragrout G11** is designed to fill joints up to 5mm in width. **Terragrout G11** complies to the requirement as per EN 138888 and passes all tests required for CG1 classified grouts.

Advantages
- Crack-free jointing
- Water resistant
- Fade resistant
- Excellent adhesion
- Easy workability

Area of use
- Swimming pools
- Bathrooms
- Kitchens
- Interior floors and walls
- Exterior floors and walls
- Roofs

Packaging:
- 20kg paper bag
- 5kg plastic bag

Maxi® Tile Grout (MG) General purpose cementitious tile grout

Terraco Maxi Tile Grout is a general purpose, water-resistant grout for filling joints in exterior and interior walls and floor ceramic tiles, mosaics and clinkers. It is specially formulated to fill joints of up to 5mm in width.

Advantages:
- Crack-free jointing
- Does not shrink
- Fade resistant
- Good adhesion
- Easy workability

Areas of use:
- Interior floors and walls
- Exterior floors and walls
- Bathrooms
- Kitchens
- Roofs

Packaging:
- 5kg plastic bag

TERRACO

Performance Grades (Interior & Exterior)

Terrafix™ W11

C1T Non-Slump Wall Tile Adhesive

TOOLS

Notched Trowel

Product code:
- White: 75545
- Grey: 75540

Packaging:
- 20kg paper bag

Areas of use:

- Concrete swimming pools
- Stable masonry substrates such as sand / cement render, precast concrete, etc.

Consumption rate:

- Trowel No. 4 — 2.0 - 2.5 kg/m²
- Trowel No. 5 — 2.5 - 3.0 kg/m²
- Trowel No. 6 — 4.0 - 6.0 kg/m²



Terrafix™ W22

C2TE High Strength Wall Tile Adhesive

TOOLS

Notched Trowel

Product code:
- White: 75575
- Grey: 75570

Packaging:
- 20kg paper bag

Areas of use:

As a high strength non-slump ceramic tile adhesive for laying stone, mosaic, marble, natural stones, vitrified tiles on masonry substrates such as sand/ cement render, precast concrete, gypsum board, sound painted walls

Consumption rate:

- Trowel No. 4 — 2.0 - 2.5 kg/m²
- Trowel No. 5 — 2.5 - 3.0 kg/m²
- Trowel No. 6 — 4.0 - 6.0 kg/m²

Note: Applicable for dimensionally stable surface.

Terrafix™ W23

High Strength Fast Setting Tile Adhesive

TOOLS

Notched Trowel

Product code:
- White: 75585
- Grey: 75580

Packaging:
- 20kg paper bag

Areas of use:

- Ideal for renovation work and where fast setting time is required and can be grouted after 3 hours.
- Ceramic tiles, natural stone and mosaic tile adhesive.
- All types of masonry substrates such as sand/ cement render, precast concrete, gypsum board, sound painted walls, etc.

Consumption rate:

- Trowel No. 4 — 2.0 - 2.5 kg/m²
- Trowel No. 5 — 2.5 - 3.0 kg/m²
- Trowel No. 6 — 4.0 - 6.0 kg/m²

TERRACO

Complies to EN12004 / EN12002 & EN 13888

Terrafix™ W32

C2TE S1 Flexible Wall Tile Adhesive

TOOLS

Notched Trowel

Product code:
- White: 75605
- Grey: 75600

Packaging:
- 20kg paper bag

Areas of use:

- Fixing ceramic and stone on existing tiled surface
- Gypsum boards
- Cement fibre boards
- Interior and exterior masonry substrates

Consumption rate:

- Trowel No. 4 — 2.0 - 2.5 kg/m²
- Trowel No. 5 — 2.5 - 3.0 kg/m²
- Trowel No. 6 — 4.0 - 6.0 kg/m²

Terrafix™ W42

C2TE S2 Highly Flexibility Tile Adhesive

TOOLS

Notched Trowel

Product code:
- Grey: 75620
- White: 75625

Standard kit: 25kg (21kg powder + 4ltr resin)

Areas of use:

- Suitable for interior and exterior walls where high flexibility is required
- For fixing tiles on deformable substrates such as marine plywood, old wooden floors
- For fixing tiles in areas of high vibration such as tunnels
- For fixing stone tiles sensitive to staining

Consumption rate:

- Trowel No. 4 — 2.0 - 2.5 kg/m²
- Trowel No. 5 — 2.5 - 3.0 kg/m²
- Trowel No. 6 — 4.0 - 6.0 kg/m²

Terragrout® G11

CG1 Polymer Modified Water Resistant Ceramic Tile Grout

TOOLS

Grout spreader

Available in 24 colours

Product code:
- 75800

Packaging:
- 25kg paper bag
- 5kg plastic bag

* For joint width: 2 - 5 mm

Areas of use:

- Swimming pools
- Bathrooms and kitchens
- Interior floors and walls
- Exterior floors and walls
- Roofs

Consumption rate:

- 0.5 - 1.0 kg per m² depending upon width of tile joints

TERRACO

Terrafix™

Tile Adhesive for Internal and External Usage

TOOLS

Notched Trowel

Product code:
- White: 75120
- Grey: 75110

Packaging:
- 20kg paper bag

Areas of use:

- Walls and floors of concrete
- Lightweight concrete and plaster

Consumption rate:

- 0.85 kg/m²/1mm layer using notched trowel method
- Actual consumption will depend upon the surface

General Purpose Grades (Interior & Exterior)

Maxi™ Tile Mortar

General Purpose Cementitious Tile Adhesive

TOOLS

Notched Trowel

Product code:
- White: 75510
- Grey: 75520

Packaging:
- 20kg
- 25kg

Areas of use:

- Exterior and interior
- Walls and floors of concrete
- Lightweight concrete and plaster

Consumption rate:

- 0.85 kg/m²/1mm layer using notched trowel method
- Actual consumption will depend upon the porosity of the surface

Tilebond® 2000 (grey) & 2100 (Natural white)

General Purpose Cementitious Tile Adhesive

TOOLS

Notched trowel

Product code:
- White: 75191
- Grey: 75181

Packaging:
- 20kg paper bag

Areas of use:

- Exterior and interior
- Walls and floors of concrete
- Lightweight concrete and plaster

Consumption rate:

- 0.85 kg/m²/1mm layer using notched trowel method
- Actual consumption will depend upon the porosity of the surface

TERRACO

Maxi™ Tile Paste

Ceramic Tile Adhesive In Ready-mixed Paste Form

TOOLS

Notched Trowel

Available in Off white

Product code:
- White: 65610

Packaging:
- 25kg
- 5kg

Areas of use:

- Fair-faced concrete
- Lightweight concrete
- Plywood
- Gypsum walls
- Plasterboard
- Chipboard

Consumption rate:

1.5 - 3 kg/m² depending on tile and base



Maxi™ Tile Grout

General Purpose Cementitious Tile Grout

TOOLS

Grout speader

Available in 24 colours

Product code:
- 75530

Packaging:
- 5kg plastic bag

Areas of use:

- Interior floors and walls
- Exterior floors and walls
- Bathrooms and kitchens
- Roofs

Consumption rate:

- 0.5 - 1.0 kg/m² depending upon width of tile joints

Primers & Bonding agent

Terrabond® A / Terrabond® AP201

Highly Concentrated Acrylic Bonding Agent / Special Primer and Adhesion Promoter for Difficult Substrates

TOOLS

Spray, Brush, Roller, Brush, Roller

Areas of use

- As a primer for AAC Blocks to reduce porosity
- As a primer or sealer for decorative coatings
- For repairing surfaces (bonding agent)
- Plaster and screed additive
- For tile fixing (surface consolidating primer and additive
- For cement based paints and as lime wash additive

Areas of use

- Fairface dense concrete
- Microsilica concrete
- Galvanized steel
- Glass substrates
- Ceramics
- Mild steel
- Stainless steel