

//// TERRACO®

Terracoat Superfine



Intricate fine finish texture

A versatile texture coating with a wide range of finishes.

Terracoat Superfine is formulated using a finely graded aggregate which forms a fine and even finish. The product creates a sandy textured appearance. This fine texture covers defects, minor cracks and undulations in the substrate.



Terracoat Superfine



Terracoat Sil Superfine



Terracoat Flex Superfine



Extremely tough & durable

All Terracoat Superfine products are formulated with an acrylic binder and special additives to give it outstanding strength. The product is tested and certified for its toughness and excellent surface durability.



Excellent impact & abrasion resistance

All Terracoat Superfine products are designed to withstand impact and abrasion in low lying areas of buildings which are exposed to everyday wear and tear.



Excellent weather & UV resistance

All Terracoat Superfine products have been developed to withstand extreme climatic conditions like the extreme heat of Middle Eastern deserts, severe monsoons of Asia and the harsh cold of the Scandinavian region.



Excellent dirt pick-up resistance

Terracoat Sil Superfine is specially formulated with a silicone binder that forms a strong film with excellent resistance to dirt and dust.



Excellent for renovation & retrofit

Terracoat Flex Superfine is specially formulated with an elastomeric binder which gives it enhanced flexibility over a wide range of temperatures. The coating can bridge cracks and cover minor damages which makes this a perfect solution for renovation and retrofit projects.



Other Features and Benefits

- ◆ Good vapour permeability allows the substrate to breathe reducing water vapour damage.
- ◆ Highly versatile product that can be applied in multiple ways.
- ◆ Water based and environmentally friendly.

Terracoat Superfine is perfect for

- ◆ Exterior applications.
- ◆ New work and renovation / retrofit projects.
- ◆ All types of buildings – residential, commercial, leisure, educational and more.

Areas of use

- ◆ Concrete
- ◆ Cement rendering
- ◆ Lightweight concrete
- ◆ Cement fibre boards
- ◆ Sprayplaster

How to use

New work

- 1 Roller apply 1 coat of Terraco P Primer or Tex Primer.
- 2 Allow to cure.
- 3 Apply Terracoat Superfine based on required performance option.

Renovation / Retrofit

- 1 All cracks, chips, voids and damages should be repaired with appropriate filler.
- 2 Prepare surface by removing loose or flaking paint, grease, dirt and grime.
- 3 Spot prime exposed areas appropriately.
- 4 Proceed as per new work.

The product can be applied with spray, roller or trowel.



Spray & flattened

Heritage

Finespray

Guideline Spread Rates

Onto cementitious substrate, cement fibre board.


Material Consumption	0.6 - 3.5 kg/m ²
----------------------	-----------------------------

**Material consumption may vary depending on substrate conditions*

Technical Data

Suitable Primer	Terraco P Primer or Tex Primer
Dilution / Thinning	Water if required
Drying Time	3 – 4 hours
Specific Gravity	1.45
Viscosity	50 – 60 cps
Colours	50 standard colours
Packaging	25 kg plastic pails
Storage	12 months in original unopened containers
Application Method	Spray, roller, trowel



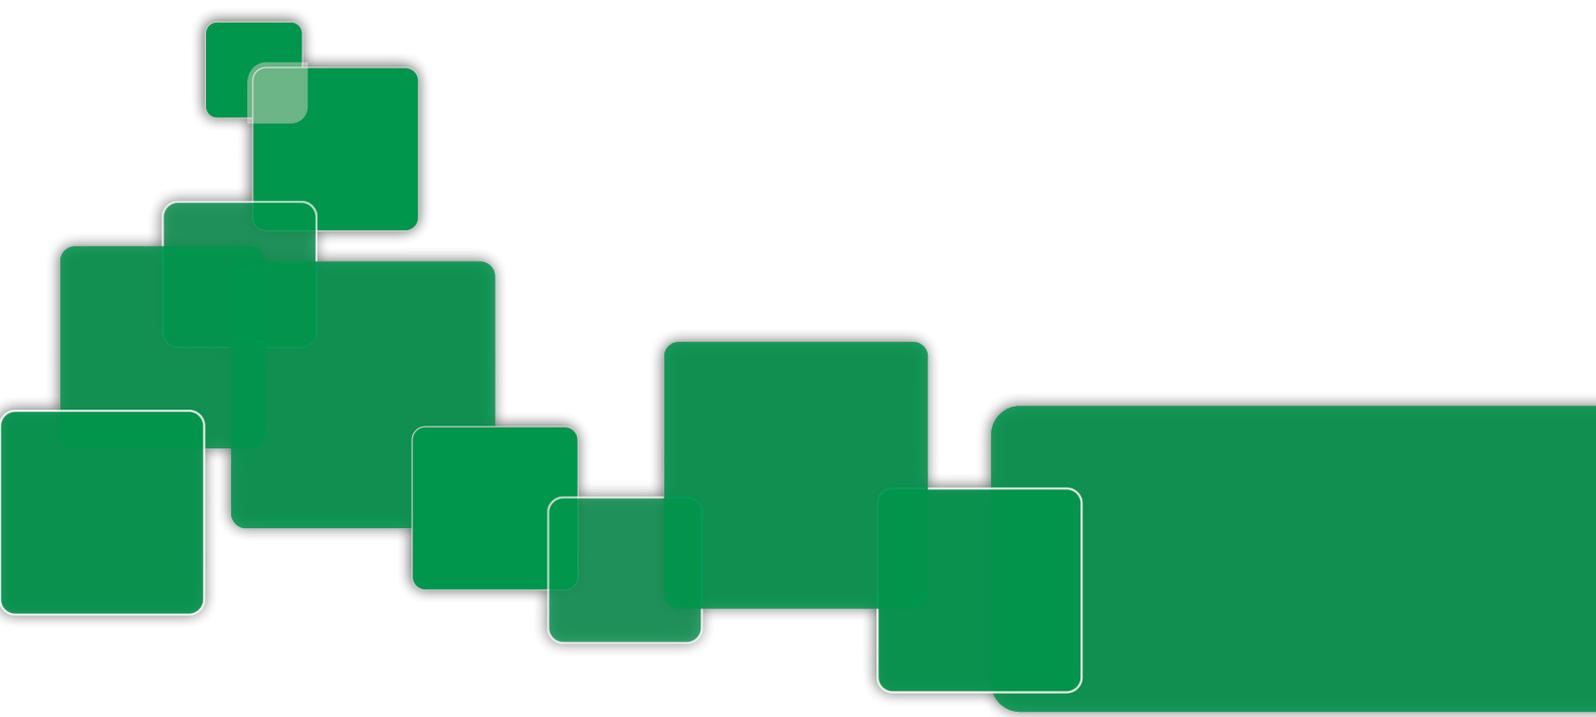

www.terraco.com

SWEDEN • UK • IRELAND • RUSSIA • TURKEY • ALGERIA • EGYPT
SOUTH AFRICA • JORDAN • UAE • THAILAND • VIETNAM • CHINA • KOREA